www.buyersproducts.com
Phone (440) 974-8888
Fax 800-841-8003

Installation Instructions

5626782 Stop/Turn/Tail/Backup/ Strobe Light, Low Profile, 2 Stud Mount



Features:
- Integrated Warning, Reverse and Stop/Turn/Tail
- 2 Stud Mount
- SAE J 595 Class 1 Rated Amber Strobe
- IP67 Sealed

Specifications:
- Voltage: 12-24VDC
- Amps: up to 1.1 Amps @12V
- Total # of LED's: 102
- Flash Patterns: 6
- Operating Temperature: -22°F to 158°F
- Certifications: SAE J595, FMVSS 108

Wiring Configuration:
- Blue – Stop/Turn Light
- White – Ground (required for all functions)
- Brown – Tail light
- Purple – Reverse light
- Red – Warning light
- Yellow – Synchronization/Pattern Change
- Green – Alternation.
- To change the Flash patterns, apply +VDC to yellow for less than 1 second and release.


Flash Patterns:
1. Single Flash Amber
2. Double Flash Pattern Amber
3. Triple Flash Pattern Amber
4. Quad Flash Pattern Amber
5. Triple Flash Alternating Amber/Clear
6. Steady On Amber for External Flasher

***** Reverse Function Overrides Warning Light Function. *****


WARRANTY

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.

DIMENSIONAL DIAGRAM

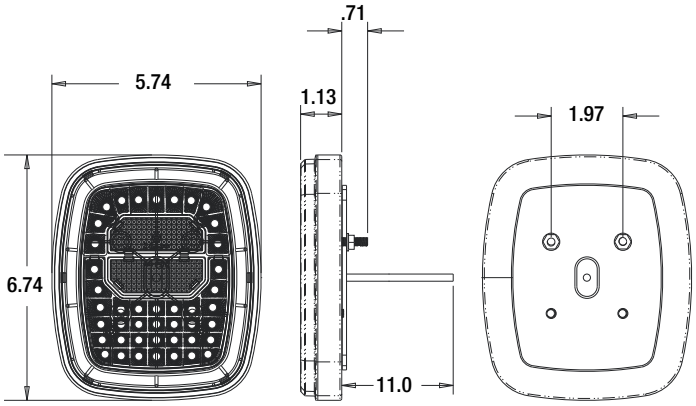

SYNC WIRING DIAGRAM

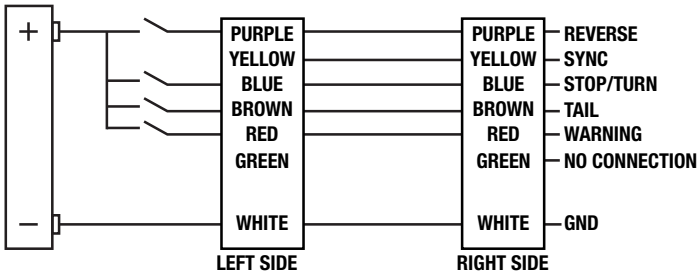

ALTERNATING WIRING DIAGRAM

