www.buyersproducts.com
Phone (440) 974-8888
Fax 800-841-8003

Installation Instructions

3062236
Hydraulic Motor Seal Saver
For 4-Bolt, 3.25in B/C Hydraulic Motors


⚠ WARNING

Disconnect hydraulic motor or turn off power to hydraulic system prior to installation.


Installation

1. Position the seal saver plate between the motor and the motor mount plate with the circular cutout facing the motor and align the screw holes as shown in figure 1. Make sure to orient the plate so that the grease fitting can be accessed once installed.
2. Attach the seal saver plate and motor to the motor mount plate using the included screws.
3. Apply grease to the grease fitting as necessary to coat and protect the motor seal.

Fig. 1

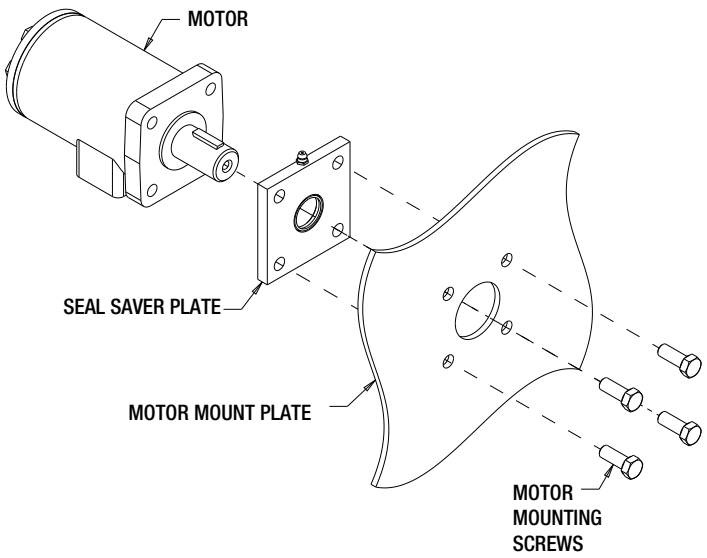

Bill of Materials

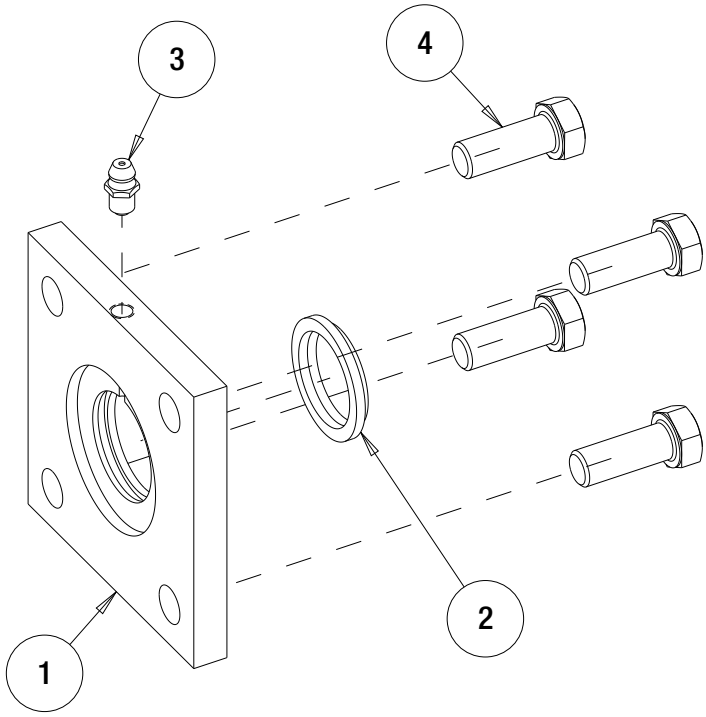

ITEM	PART NO.	QTY.	DESCRIPTION
1	3062313	1	Plate, Seal Saver, 4 Bolt
2	3062314	1	Seal, Shaft, 1 inch
3	400	1	Grease Fitting, 1/4-28 Thread
4	FCS038016100SS	4	Screw, Cap 3/8-16 x 1 in, SST

WARRANTY

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.