

Installation Instructions

32 LED Stop/Turn/Tail/ Backup/Strobe Lights 5624432 4" Round & 5626432 6" Oval

FEATURES:

- Integrated warning, reverse, and stop/turn/tail functions
- Grommet mount or surface mount with a chrome cover
- SAE J595 Class 1 Rated Amber Strobe
- IP69K Rated

SPECIFICATIONS:

- Voltage: 12-24VDC
- Amps: 1.3 Amps @ 12V
- Watts: 16W
- # of LED's: 32
- Flash Patterns: 19
- Mount Style: Grommet or Screw
- Operating Temperature: -22° to 158°F
- Certifications: SAE J595, CA13, R65, R7, R91, FMVSS-108

FLASH PATTERNS:

1	Random (Default)	11	Single (All)
2	Single (Split)	12	Double (All)
3	Double (Split)	13	Quad (All)
4	Quad (Split)	14	Quint (All)
5	Quint (Split)	15	Ultra (All)
6	Ultra (Split)	16	Single-Quad (All)
7	Single-Quad (Split)	17	Single-H/L (All)
8	Single-H/L (Split)	18	Steady 2 (California)
9	ECE R65 Single (All)	19	Steady 4 (All)
10	ECE R65 Double (All)		

WIRING CONFIGURATIONS:

RED - Apply +VDC to wire to activate warning function

BLACK - Ground Wire. Apply the wire to the power to activate the product.

YELLOW - Synchronization, flash pattern selection and reset

- Connect YELLOW wires of all heads together for synchronization
- To change flash patterns, apply +VDC for less than 1 second and release
- Flash patterns will be reset when YELLOW wires are connected to RED wire for more than 5 seconds

WHITE - Alternation. With the power off, connect the wire from one lighthouse to + VDC and leave the other unconnected. Their patterns will alternate when the lighthouses are activated.

GRAY - Turn signal/Brake light


PURPLE - Tail light/Parking light

PINK - Reversing light




MOUNTING OPTIONS:

5624432

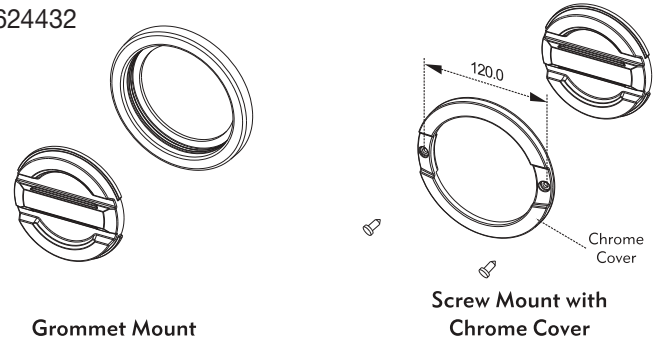

5626432

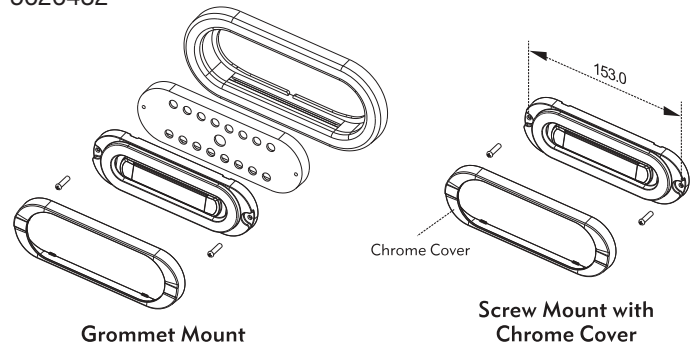

WARRANTY

Buyers Products Company warranties all LED Strobe and LED Work Light products to the original owner against defects in workmanship and material for a period of five (5) years from the date of purchase unless otherwise specified. Buyers Products must review each warranty claim and reserves the right to offer a refund for the original sale price of the product or replace the defective light. The five (5) year warranty is non transferable, applies to the original owner, and is subject to the following terms and conditions. The warranty will be void in cases of misuse, severe abuse, and failure to properly install the LED Light. Breakage of the lens or housing, corrosion at the plug, wire wicking, voltage spikes, and product failure caused by road chemicals and acid type washes are not warrantable claims. This warranty gives you specific legal rights and you may also have other legal rights that vary from state to state.